




Profile i falbany


Profile PVC-/PU odporne na oleje i tłuszcze z tkaniną lub bez, kolory: białe, zielone, transparentne

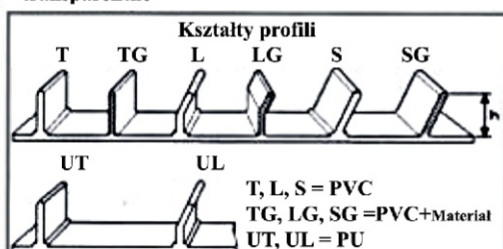

T, L, S = PVC
TG, LG, SG = PVC+Material
UT, UL = PU


| Typ profilu | Wys.(h) w mm | Min. sred. rolki w mm | Waga kg/m |
|-------------|--------------|-----------------------|-----------|
| T 20 | 20 | 50 | 0,24 |
| T 30 | 30 | 75 | 0,36 |
| T 40 | 40 | 100 | 0,46 |
| T 50 | 50 | 125 | 0,55 |
| T 60 | 60 | 150 | 0,89 |
| T 75 | 75 | 190 | 1,10 |
| TG 20 | 20 | 30 | 0,25 |
| TG 30 | 30 | 45 | 0,38 |
| TG 40 | 40 | 60 | 0,47 |
| TG 50 | 50 | 75 | 0,56 |
| TG 60 | 60 | 90 | 0,75 |
| TG 75 | 75 | 100 | 0,90 |
| TG 100 | 100 | 150 | 1,05 |
| L 40 | 40 | 100 | 0,46 |
| L 65 | 65 | 160 | 0,95 |
| LG 40 | 40 | 60 | 0,47 |
| LG 60 | 60 | 90 | 0,75 |
| LG 80 | 80 | 110 | 0,90 |
| LG 100 | 100 | 150 | 1,05 |
| S 30 | 30 | 75 | 0,36 |
| S 40 | 40 | 100 | 0,46 |
| S 50 | 50 | 125 | 0,56 |
| S 75 | 75 | 160 | 0,95 |
| SG 30 | 30 | 45 | 0,38 |
| SG 40 | 40 | 60 | 0,47 |
| SG 50 | 50 | 75 | 0,56 |
| SG 60 | 60 | 90 | 0,75 |
| SG 75 | 75 | 110 | 0,90 |
| SG 100 | 100 | 150 | 1,05 |
| UT 25 | 25 | 60 | 0,15 |
| UT 35 | 35 | 60 | 0,25 |
| UL 40 | 40 | 60 | 0,22 |

Profile prowadzące z PVC i PU

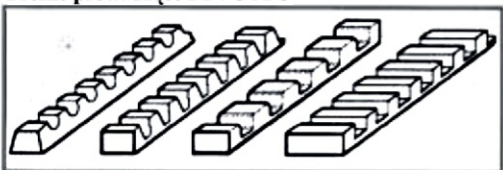


Służą jako profile prowadzące zgrzewane do taśm

Falbany PVC-/PU odporne na oleje i tłuszcze z tkaniną lub bez, kolory: białe, zielone.
Falbany PU ze stopką.

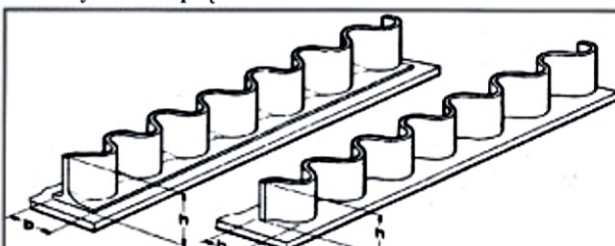

| Typ falbany | Wys.(h) w mm | Szer. w mm | Min. sred. rolki w mm | Waga w kg/m |
|-------------|--------------|------------|-----------------------|-------------|
| W 20/35 | 20 | 35 | 50 | 0,30 |
| W 30/35 | 30 | 35 | 75 | 0,45 |
| W 40/35 | 40 | 35 | 100 | 0,52 |
| W 40/50 | 40 | 50 | 100 | 0,65 |
| W 60/50 | 60 | 50 | 150 | 0,98 |
| W 80/50 | 80 | 50 | 200 | 1,30 |
| W 100/50 | 100 | 50 | 250 | 1,62 |
| PU 20/25 | 20 | 25 | 90 | 0,14 |
| PU 30/25 | 30 | 25 | 100 | 0,21 |
| PU 40/25 | 40 | 25 | 120 | 0,28 |
| PU 50/50 | 50 | 50 | 150 | 0,63 |
| PU 60/50 | 60 | 50 | 160 | 0,75 |
| PU 80/50 | 80 | 50 | 200 | 1,00 |
| PU 100/50 | 100 | 50 | 250 | 1,25 |

Profile prowadzące -PVC

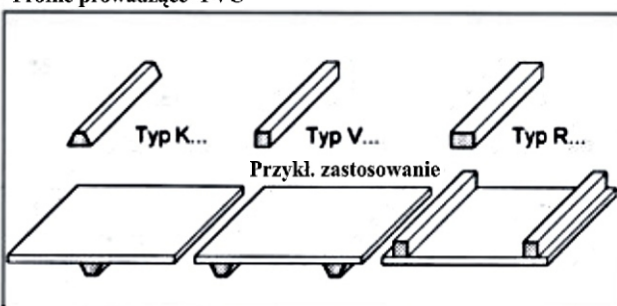

| Typ profilu | Szer. w mm | Wys. w mm | Min. sred. rolki w mm | Waga w kg/m |
|-------------|------------|-----------|-----------------------|-------------|
| K 6x4 | 6 | 4 | 40 | 0,025 |
| K 8x5 | 8 | 5 | 50 | 0,045 |
| K 10x6 | 10 | 6 | 60 | 0,060 |
| K 13x8 | 13 | 8 | 80 | 0,100 |
| K 17x11 | 17 | 11 | 110 | 0,170 |
| K 30x16 | 30 | 16 | 250 | 0,480 |
| V 10x10 | 10 | 10 | 100 | 0,170 |
| V 15x15 | 15 | 15 | 200 | 0,270 |
| R 20x15 | 20 | 15 | 200/250 | 0,360 |

Te profile mogą być doklejane również jako zabieraki